

 <b>FUZETEC TECHNOLOGY CO., LTD.</b>	<b>NO.</b>	<b>PQ14-101E</b>		
	<b>Product Specification and Approval Sheet</b>	<b>Version</b>	<b>7</b>	<b>Page</b>

## Axial Leaded PTC Resettable Fuse: FVT Series

### 1. Summary

- (a) **RoHS Compliant & Halogen Free**
- (b) **Applications: Laptop Computer, Rechargeable battery packs, Lithium cell and battery packs**
- (c) **Product Features: Low profile, Solid state**
- (d) **Operation Current: 1.1A~2.4A**
- (e) **Maximum Voltage: 16VDC**
- (f) **Temperature Range : -40°C to 85°C**

### 2. Agency Recognition

**UL:** File No. E211981  
**C-UL:** File No. E211981  
**TÜV:** File No. R50004084


### 3. Electrical Characteristics (23°C)

Part Number	Hold Current I <sub>H</sub> , A	Trip Current I <sub>T</sub> , A	Max. Time to Trip at 5xI <sub>H</sub> , S	Rated Voltage V <sub>MAX</sub> , VDC	Maximum Current I <sub>MAX</sub> , A	Typical Power Pd, W	Resistance		
							R <sub>MIN</sub> Ohms	R <sub>MAX</sub> Ohms	R <sub>1MAX</sub> Ohms
<b>FVT110F</b>	1.10	2.7	5.0	16	100	0.7	0.038	0.070	0.140
<b>FVT170F</b>	1.70	3.4	5.0	16	100	0.7	0.030	0.052	0.105
<b>FVT175F</b>	1.75	3.6	5.0	16	100	0.8	0.029	0.051	0.102
<b>FVT200F</b>	2.00	4.7	5.0	16	100	0.9	0.022	0.039	0.078
<b>FVT210GF</b>	2.10	4.7	5.0	16	100	1.2	0.018	0.030	0.060
<b>FVT240F</b>	2.40	5.9	5.0	16	100	1.0	0.014	0.026	0.052

I<sub>H</sub>=Hold current-maximum current at which the device will not trip at 23°C still air.  
 I<sub>T</sub>=Trip current-minimum current at which the device will always trip at 23°C still air.  
 V<sub>MAX</sub>=Maximum voltage device can withstand without damage at its rated current.  
 I<sub>MAX</sub>= Maximum fault current device can withstand without damage at rated voltage (V<sub>MAX</sub>).  
 Pd=Typical power dissipated from device when in tripped state in 23°C still air environment.  
 R<sub>MIN</sub>=Minimum device resistance at 23°C.  
 R<sub>1MAX</sub>=Maximum device resistance at 23°C, 1 hour after tripping.  
 Physical specifications: Lead material: 0.125mm nominal thickness, quarter-hard nickel.  
 Insulating material: Polyester tape.




### 4. Production Dimensions (millimeter)

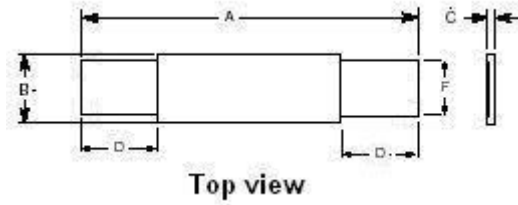

Part Number	A		B		C		D		F	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
FVT110F	23.6	25.6	2.6	2.9	0.5	0.9	7.0	8.0	2.3	2.5
FVT170F	15.4	17.5	7.0	7.4	0.5	0.9	4.0	6.2	3.9	4.1
FVT175F	21.0	23.0	3.5	3.9	0.5	0.9	4.6	6.6	2.9	3.1
FVT200F	21.0	23.0	4.1	4.5	0.5	0.9	3.0	4.8	2.9	3.1
FVT210GF	21.0	23.0	4.9	5.2	0.5	0.9	4.1	5.5	3.9	4.1
FVT240F	23.8	26.0	4.9	5.3	0.5	0.9	3.5	5.5	3.9	4.1


### 5. Thermal Derating Curve

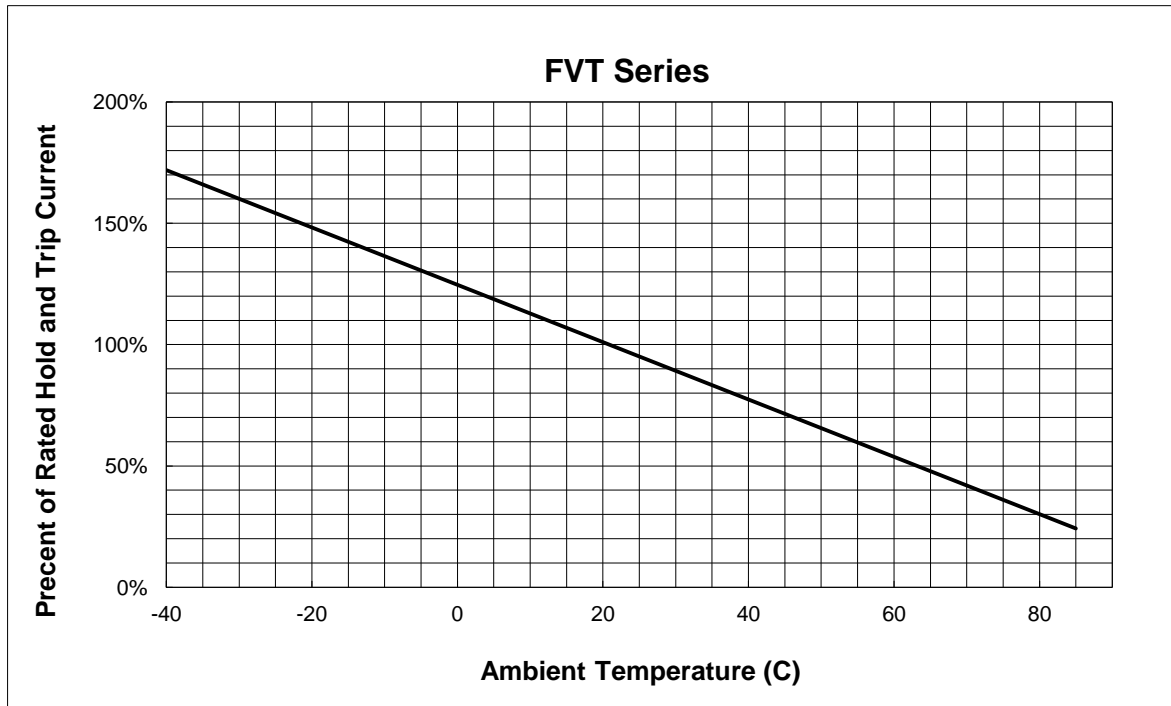



### 6. Typical Time-To-Trip at 23°C

- A= FVT 110F
- B= FVT 170F
- C= FVT 175F
- D= FVT 200F
- E= FVT 210F
- F= FVT 240F

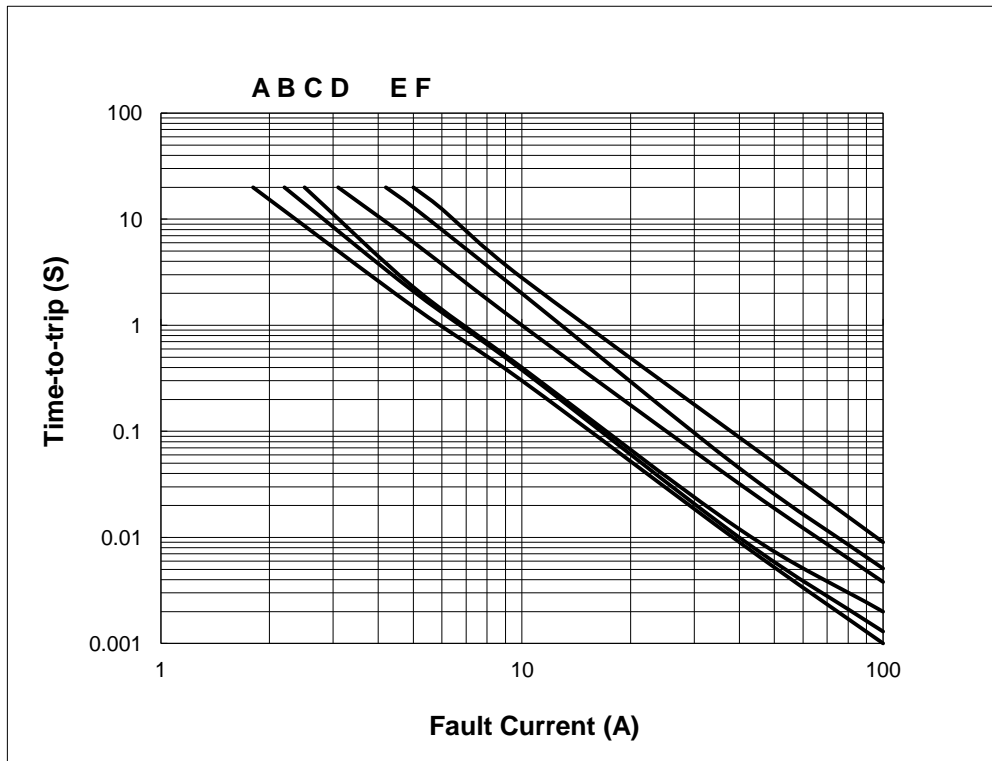

### 7. Material Specification



Lead material: 0.125 mm nominal thickness, quarter-hard nickel

Insulating material: Polyester tape

### 8. Part Numbering and Marking System

#### Part Numbering System


FVT □ □ □ F

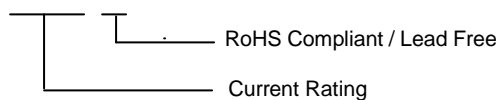

Example

#### Part Marking System

FVT □ □ □ F

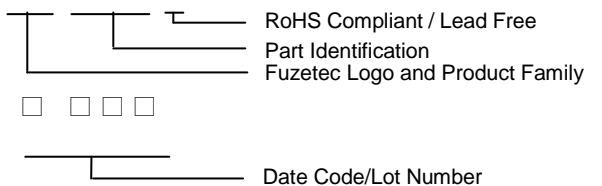

**Warning:** -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

NOTE : Specification subject to change without notice.